

367.40825X00



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): AMINEH, Romel  
Serial No.: Not yet assigned  
Filed: December 7, 2001  
Title: COMMUNICATION UNIT PROVIDED WITH INTRA-  
CHANGEABLE ELEMENTS  
Group: Not yet assigned

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

December 7, 2001

Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 0031373.4, filed December 21, 2000.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

  
\_\_\_\_\_  
Carl I. Brundidge  
Registration No. 29,621

CIB/alb  
Attachment  
(703) 312-6600

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed   
Dated 8 November 2001.

THIS PAGE BLANK (USPTO)

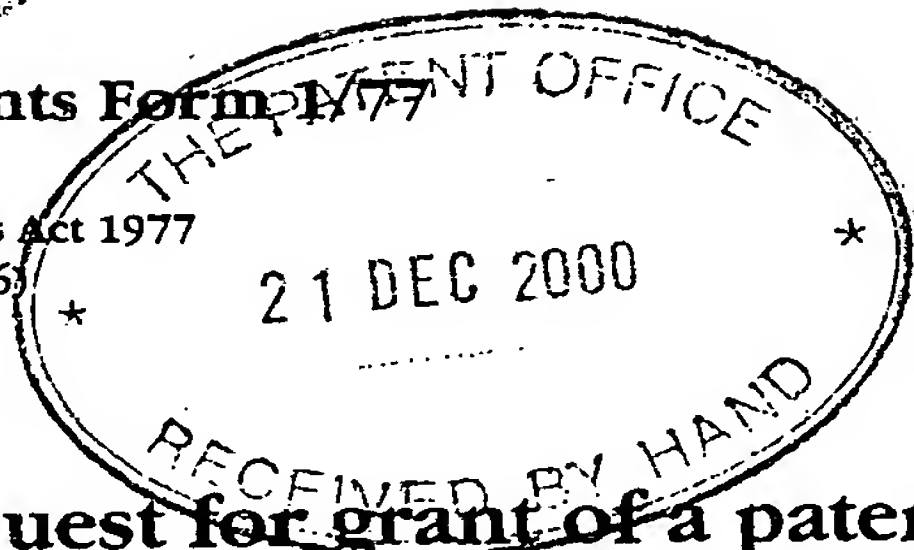

The  
Patent  
Office

22DEC00 E593657-1 D02716  
P01/7700 0.00-0031373.4

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

PAT 00325 GB

2. Patent application number

(The Patent Office will fill in this part)

21 DEC 2000

0031373.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED  
KEILALAHDENTIE 4  
02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

05911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

COMMUNICATION UNIT PROVIDED WITH  
INTRA-CHANGEABLE ELEMENTS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT  
NOKIA HOUSE  
SUMMIT AVENUE  
FARNBOROUGH  
HAMPSHIRE  
GU14ONG UK

Patents ADP number (if you know it)

7577638001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

5

Abstract

1

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*K Jones*

KENDRA JONES

Date

14.12.2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr A Franks 01252 965015

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

PAT 00325 GB

Communication unit provided with intra-changeable elements

5 The invention relates to a communication unit provided with intra-changeable elements. The intra-changeable elements are used as input and/or output device for the communication unit.

10 In communication units or mobile phones as they can also be called there is often a need for an improved or easier way to input data. Especially since mobile phones are provided with several input methods and it is not always obvious to the user which options are available for each application in the mobile phone. In most mobiles phones the different available options are displayed in the bottom of the display and different soft-keys of the phone are used to select the options.

15 However many of the latest phones are provided with options that not are displayed on the display. This forces the user to remember hidden options for each application or to be irritated when he/she has selected the wrong option and needs to turn back for another selection.

20 The normally used input device also limits the user options of a more personalised input. In present mobile phones the available features for the user are voice, text messaging (SMS) and picture messaging. Vibrations can also be used as incoming message alert if the receiver has set his/her phone to that option, but that is more of an alerting option than a way of communication. As described there

25 are not any options for transfer of a more physical message, like a hug or a squeeze of a hand etc.

The purpose with this invention is to propose a mobile phone having an input device that overcomes the drawbacks of the present mobile phones for indicating

30 the available input options and how to create a new type of input.

The claimed invention provides a communication unit with an input device enabling the user to sense different available input options. Its also provides a communication unit with an input device for input of a new more personalised message, where the same input device can also be used as output device for the  
5 same type of messages.

One aim of the invention is to provide a communication unit with an input device that enables the user to sense the different available input options.

10 According to a first preferred embodiment of the claimed invention this objective is obtained by a communication unit provided with intra-changeable elements, where the physical properties of the elements may be changed by an electrical or a mechanical signal/input and that the elements are used in the user interface of the communication unit to enable flexible input and output of data from the  
15 communication unit.

Another aim of the invention is to provide a communication unit with an input device that enables the user to input a physical or sensory message.

20 According to a second preferred embodiment of the claimed invention this objective is obtained by a communication unit provided with intra-changeable elements, where the physical properties of the intra-changeable elements are changed by an electrical or a mechanical signal/input, and that the intra-changeable elements are used in the user interface of the communication unit to  
25 enable flexible input and output of data from the communication unit.

A third aim of the invention is to provide a method for transferring a physical message from one communication unit to another communication unit.

According to a third preferred embodiment of the claimed invention this objective is obtained by a method for transferring an input from a first communication unit to a second communication unit, and displaying the input as output in the second communication unit in the following manner: compress an input device including  
5 intra-changeable elements on a first communication unit, transform the input from the intra-changeable elements of the input device to electrical signals, transfer the electrical signals with the first communication unit to a second communication unit, re-transform the electrical signals in the second communication unit to output signals and, and finally transfer the output signals to the intra-changeable  
10 elements of the second communication unit and expand the intra-changeable elements according to the output signals.

Figure 1 shows in a perspective view a known embodiment of a communication unit.  
15

Figure 2 schematically shows the essential parts of a telephone for communication with a cellular network.

Figure 3 shows in a perspective view preferred embodiments of the communication unit having a four-way-scroller.  
20

According to a first aspect the communication unit provided with intra-changeable elements according to the invention will be described with reference to a hand portable phone, preferably a cellular/mobile phone. An embodiment of this phone  
25 is shown in figure 1, where a cellular/mobile phone is shown in perspective. As will be seen, the phone is provided with a front cover 2 having a window frame 3 encircling the protection window of the display assembly 1. The cellular/mobile phone comprises a user interface having an on/off button 4, a keypad 7, a battery 14 (not shown), a display/LCD 1, an earpiece 21 and a microphone 22 (not  
30 shown).

The keypad 7 has a first group of keys 8 as alphanumeric keys, by means of which the user can enter a telephone number, write a text message (SMS), write a name (associated with the phone number), etc. Each of the twelve alphanumeric  
 5 keys 8 is provided with a figure "0-9" or a sign "#" or "\*", respectively. In alpha mode each key is associated with a number of letters and special signs used in the text editing.

The keypad 7 additionally comprises two menu selection keys 9, two call handling  
 10 keys 12, and a navigation key 10. The functionality of the soft key depends on the state of the phone and the navigation in the menu by using a navigation key. The present functionality of the menu selection keys 9 is shown in separate fields in the display 1 just above the keys 9. The two call handling keys 12 are used for establishing a call or a conference call, terminating a call or rejecting an incoming  
 15 call.

The navigation key 10 is an up/down key and is placed centrally on the front surface of the phone between the display 1 and the group of alphanumeric keys 8. Hereby the user will be able to control this key with his thumb. This is the best site  
 20 to place an input key requiring precise motor movements. Many experienced phone users are used to one-hand handling. They place the phone in the hand between the fingertips and the palm of the hand. Hereby the thumb is free for inputting information.

25 Figure 2 schematically shows the most important parts of a preferred embodiment of the phone/terminal, said parts being essential to the understanding of the invention. The microphone 22 records the user's speech, and the analogue signals formed thereby are A/D converted in an A/D converter (not shown) before the speech is encoded in an audio part 20. The encoded speech signal is transferred  
 30 to the controller 18 (physical layer processor), which e.g. supports GSM terminal

software. The controller 18 also forms the interface to the peripheral units of the apparatus, including RAM and ROM memories 17a and 17b, a SIM card 16, the display 1 and the keypad 7 (from figure 1) as well as data, power supply, etc. The controller 18 communicates with the transmitter/receiver circuit 19. The audio part  
5 20 speech-decodes the signal, which is transferred from the controller 18 to the earpiece 21 via a D/A converter (not shown).

The preferred embodiment of the phone of the invention is adapted for use in connection with a GSM network, but, of course, the invention may also be applied  
10 in connection with other phone networks. It could be cellular networks, various forms of cordless phone systems or in dual band phones accessing sets of these systems/networks.

The controller 18 is connected to the user interface of the mobile phone. Thus, it is  
15 the controller 18, which monitors the activity in the phone and controls the display 1 in response thereto.

Therefore, it is the controller 18, which detects the occurrence of a state change event and changes the state of the phone and thus the display text. The user may  
20 cause a state change event, when he/she activates the keypad 7 including the menu selection key or keys 9, and these type of events are called entry events or user events. However, the network communicating with the phone may also cause a state change event. These type of events and other events beyond the user's control are called non-user events. Non user events comprise status change  
25 during call set-up, change in battery voltage, change in antenna conditions, message on reception of SMS, etc.

Different embodiments of the invention will be described with reference to figures 3 showing the communication unit provided with intra-changeable elements.

### **Four-way-scroller**

According to a first preferred embodiment of the claimed invention a communication unit provided with intra-changeable elements, where the physical properties of the elements are changed by an electrical or a mechanical signal/input and that the elements are used in the user interface of the communication unit to enable improved input.

As shown in figure 3 a communication unit is provided with a four-way-scroller, where the scroller is normally used for navigation in the menus of the communication unit. Compared with the communication unit shown in figure 1 the menu selection keys 9 and the navigation key 10 have been replaced by the four-way-scroller 13.

The functionality of the different parts of the scroller 13 depends on the menus and the present status of the communication unit. The functionality options in each menu is shown in the display 1 with small labels indicating the functionality options. There are however only two options displayed in the display 1 since most communication units are only provided with two soft-keys 9 to navigate in the menus although there are more options. This naturally could easily be solved by having more functionality options displayed in the display 1. Another possibility is to have the surface of the four-way-scroller 13 to indicate the different functionality options. In figure 3 is shown that the four-way-scroller 13 includes four separate surface parts. By having these parts being levelled differently this level difference could indicate which parts of the scroller surface that present the available options in that menu. The surface parts representing available options could be levelled in relation to those not representing an available option. For example if only two functionality options are available and being represented by the left and the right surface part of the scroller 13, then those two surface parts are levelled in relation to the up and down parts of the scroller 13.

This could be of great support for a user having a visual handicap that can easily find which functionality options are available. In the above description it has been shown how levelled surfaces can be used in a four-way-scroller 13, but it is clear that this could also be used for the other keys on the keypad 7 if they are supposed to represent a certain option, e.g. in game applications where typically a number of the keys on the keypad are dedicated to certain options like: move right, left, up or down, single shot, multiple etc.

To enable the surfaces of the four-way-scroller 13 to change level or to provide sensory indications they have been made by using intra-changeable elements like piezo-electrical elements. The intra-changeable elements could also be made in elasto-resistive materials with electrodes incorporated. These materials are well known to be able to change their physical characteristics when being affected by an electrical input.

#### 15 **Transfer of physical feeling**

According to a second preferred embodiment of the claimed invention a communication unit provided with intra-changeable elements, where the physical properties of the intra-changeable elements are changed by an electrical or a mechanical signal/input, and that the intra-changeable elements are used in the user interface of the communication unit to enable flexible input and output of data from the communication unit.

In the first embodiment of the invention the intra-changeable elements are used to provide a sensory indication of the available functionality options of the communication unit. In the second preferred embodiment of the claimed invention the intra-changeable elements have no predefined input or output surface, but is merely available for the user to define his own physical input.

This means that the communication unit is provided with intra-changeable elements that receive their input from the user pressing or touching the intra-changeable elements. The pattern of the user's input will be interpreted into electrical signals that are transformed into digital signals. These digital signals can be transferred to another communication unit having the same or compatible intra-changeable elements, where the digital signals are transformed into electrical signals and changing the intra-changeable elements so that the input pattern of the first communication unit becomes output pattern of the second communication unit. This transfer of a "physical" input between communication units should be possible during call. It can be transferred using User-To-User signalling (USS) or any other way of signal transfer during calls. It should also be possible to send the signal as an SMS with a header indicating that a "physical" message is coming.

In one embodiment of the intra-changeable elements the said element could be a matrix of electrodes or pixels, where each affected pixel can be located. The relative force or pressure that have been applied on each pixel is also measured. The location of the pressed or affected pixel and the relative pressure or force is transferred to the receiving communication unit by any other earlier mentioned ways of transferring. Changes of the intra-changeable elements is preferably transmitted and updated whenever a change takes place. This means that signals with update of change information is transferred when a change takes place.

The intra-changeable elements should be possible to apply on communication units having exchangeable as well as fixed covers. The covers are provided with an interface that enables the signals to be transferred from the cover to the processor of the communication unit. The interface could be any form of connecting device suitable for transferring the signals.

The intrachangeable elements may also be provided on a unit external to the communication device. For example, the intrachangeable elements may be provided as a plug-in accessory for a communication device.

- 5 The intra-changeable elements could as earlier stated be of piezo-electrical elements or elasto-resistive materials. They can be placed on any part of the communication unit that enables the user to affect the intra-changeable elements in a preferred way.
- 10 Piezo-electrical elements and their properties are well known there are prior art that describes these elements per se. Elasto-resistive material is known from US 5,805,664, disclosing an imager control system with contact detection capability, where the contact detection includes sensor elements. Each sensor element comprises a plurality of elastomeric electrodes. Elastomeric refers in this
- 15 document to electrodes that are capable of some degree of physical deformation, where the deformation results in a change in the electrical resistance of the electrode.

The term intra-changeable element includes elements in which their physical

20 characteristics (for example, form, position, colour, size etc) may be changed, for example, as a result of a mechanical or electrical signal. An intra-changeable element may also generate a mechanical or electrical signal in response to a physical deformation or force being applied thereto.

- 25 The invention is not limited to the above-described examples or to the drawings showing examples of an embodiment, but can be varied within the scope of the appended claims.

## CLAIMS

1. Communication unit having a processor for control of said communication unit, which further includes intra-changeable elements being controlled by said processor, and where said elements are used in the user interface of said communication unit.

2. Communication unit provided with intra-changeable elements according to claim 1 characterised in that said intra-changeable elements are included in the input device of said communication unit, and that said processor modulates said intra-changeable elements to provide a sensory indication of the options of said input device.

3. Communication unit provided with intra-changeable elements according to claim 2 characterised in that said input device includes at least one of said intra-changeable elements.

4. Communication unit provided with intra-changeable elements according to claim 3 characterised in that said intra-changeable element is compressible and expandable.

5. Communication unit provided with intra-changeable elements according to claim 4 characterised in that said intra-changeable element is piezo-electrical elements.

6. Communication unit provided with intra-changeable elements according to claim 4 characterised in that said intra-changeable element is made of elasto-resistive materials.

7. Communication unit provided with intra-changeable elements according to claim 5 or 6 characterised in that said input device is a four-way-scroller.

8. Communication unit provided with intra-changeable elements according to claim 5 or 6 characterised in that said input device is preferably a cover part of the communication unit.

9. Communication unit provided with intra-changeable elements according to claim 1 characterised in that said intra-changeable elements are included in both the input and the output device of said communication unit, and that said processor modulates said intra-changeable elements.

10. Communication unit provided with intra-changeable elements according to claim 9 characterised in that said input and output device includes at least one of said intra-changeable elements.

11. Communication unit provided with intra-changeable elements according to claim 10 characterised in that said intra-changeable element is compressible and expandable.

12. Communication unit provided with intra-changeable elements according to claim 11 characterised in that said intra-changeable element is piezo-electrical elements.

13. Communication unit provided with intra-changeable elements according to claim 12 characterised in that said intra-changeable element is made of elasto-resistive materials.

14. Communication unit provided with intra-changeable elements according to claim 12 or 13 characterised in that said input device is a four-way-scroller.

15. Communication unit provided with intra-changeable elements according to claim 12 or 13 characterised in that said input and output device is preferably a cover part of the communication unit.

5

16. A method for inputting of data to a communication unit provided with a keypad characterised in that individual keys of said keypad keys are changeable to provide a sensory indication of the keys available to make the communication unit performing a certain action by pressing said changeable keys, and that the  
10 change of the individual key is performed by having intra-changeable elements in said individual keys.

17. A method for transferring an input from a first communication unit to a second communication unit, and displaying said input as output in said second  
15 communication unit, where operation of said first communication unit includes the following steps:

- compress an input device including intra-changeable elements on a first communication unit,
- transform the input from said intra-changeable elements of said input device to  
20 electrical signals,
- transfer said electrical signals from said first communication unit to a second communication unit,

and where said second communication unit includes the following step:

- receive said electrical signals from said first communication unit to said second  
25 communication unit,
- retransform said electrical signals in said second communication unit to output signals to intra-changeable elements of said second communication unit and,

- transfer said output signals to said intra-changeable elements of said second communication unit and expand said intra-changeable elements according to said output signals.

5 18. Communication unit provided with intra-changeable elements as herein before described with reference to figures 1 to 3 of the accompanying drawings.

10 19. A method to input and output of data from a communication unit substantially as herein before described with reference to figures 1 to 3 of the accompanying drawings.

20. A communication device having a user interface for inputting data to the device, the device comprising:  
 a receiver for receiving a control signal;  
 15 a changeable element responsive to the received signal to change the characteristics of the element, wherein the changeable element forms part of the user interface and wherein the changeable element responds to the control signal to indicate the availability of the element for inputting data to the device.

20 21. The communications device of claim 20, wherein the changeable characteristics of the changeable element include at least one of: form, colour, height, shape, area, volume, temperature, position.

25 22. A communication device having a user interface, the device comprising:  
 a receiver for receiving a control signal;  
 a changeable element responsive to the received signal to change the characteristics of the element, wherein the changeable element forms part of the user interface and wherein the changeable element changes characteristics in response to the control signal thereby providing a sensory message to a user.

23. The communications device of claim 22, wherein the changeable characteristics of the changeable element include at least one of: form, colour, height, shape, area, volume, temperature, position.

5 24. The communication device of claim 22 or 23, wherein the changeable element generates control signals in response to a change in its characteristics.

25. The communication device of claim 24, further comprising a transmitter for transmitting the control signals generated by the changeable element in response  
10 to a physical deformation.

Communication unit provided with intra-changeable elements

#### ABSTRACT

In communication units the input and/or output of data is normally performed using keypad input, voice input/output or display output. This limits the input/output of the communication unit. The claimed invention proposes a new way of inputting/outputting of data by providing a communication unit with intra-changeable elements, where the physical properties of the elements are changed by an electrical or a mechanical signal/input and that the elements are used in the user interface of the communication unit to enable flexible input and output of data from the communication unit. The user input and output is thereby including a sensory indication, including a physical and/or visual dimension.

Figure 3

**THIS PAGE BLANK (USPTO)**

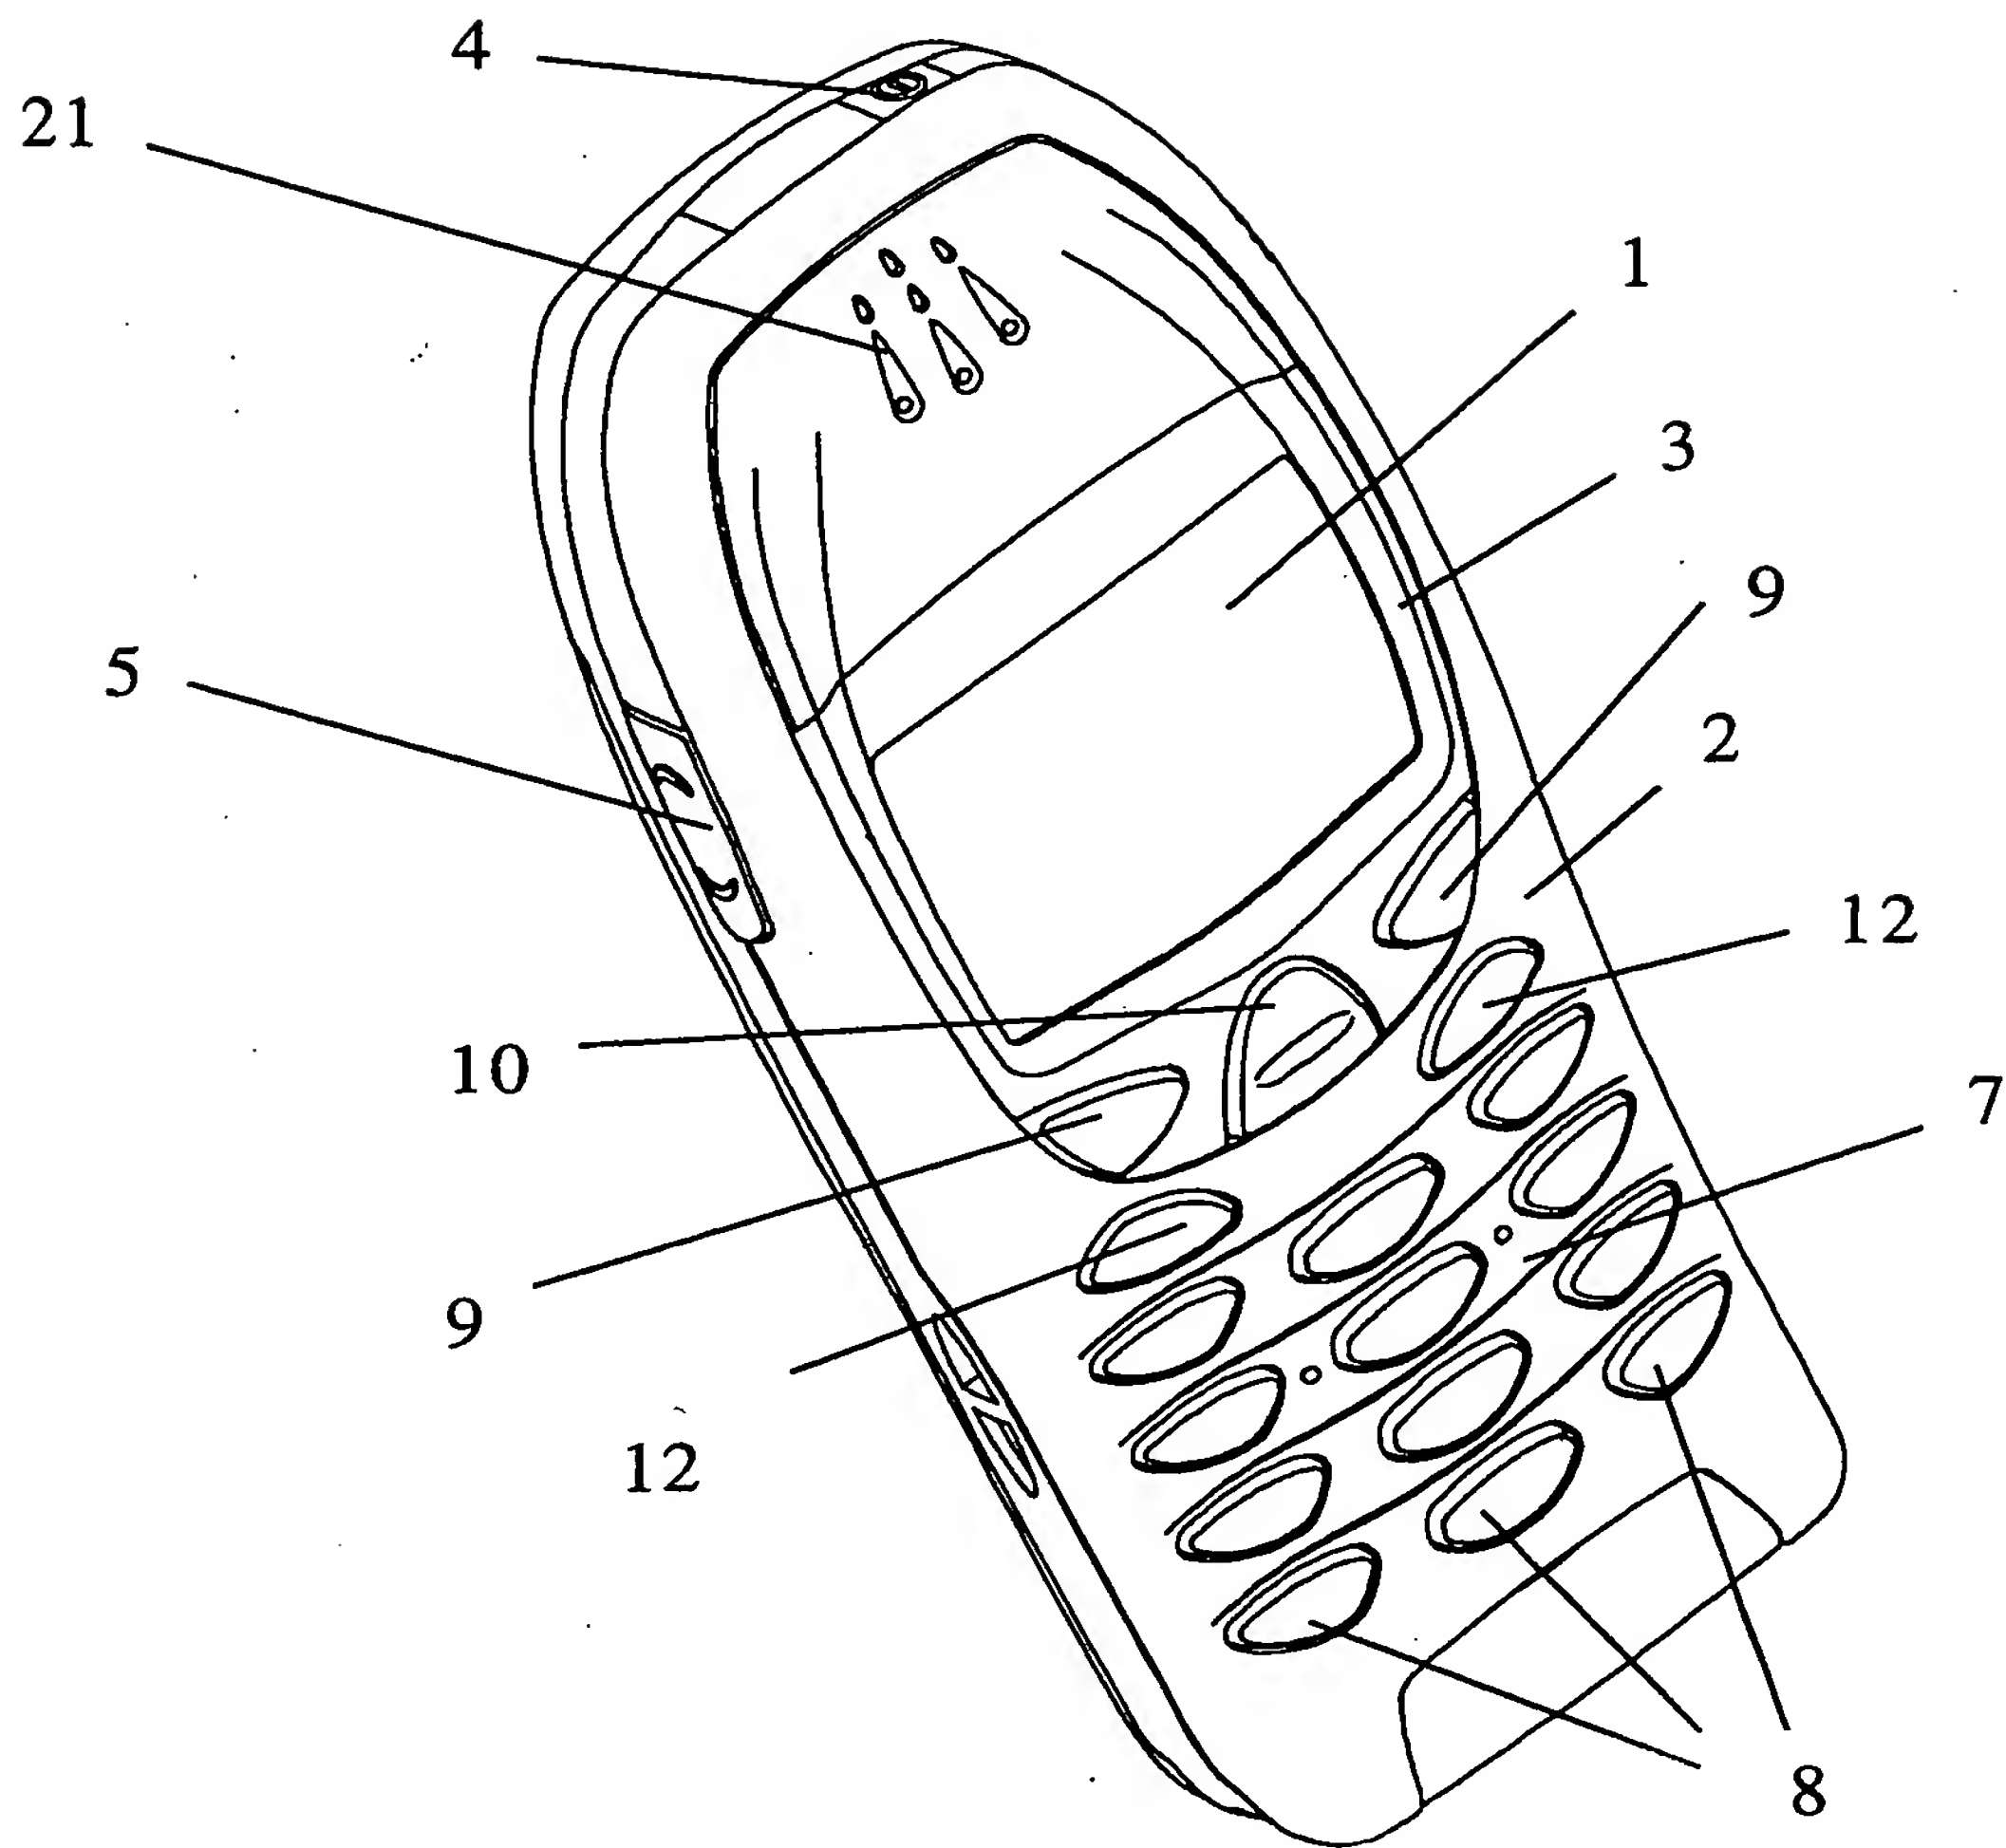


Fig. 1

**BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

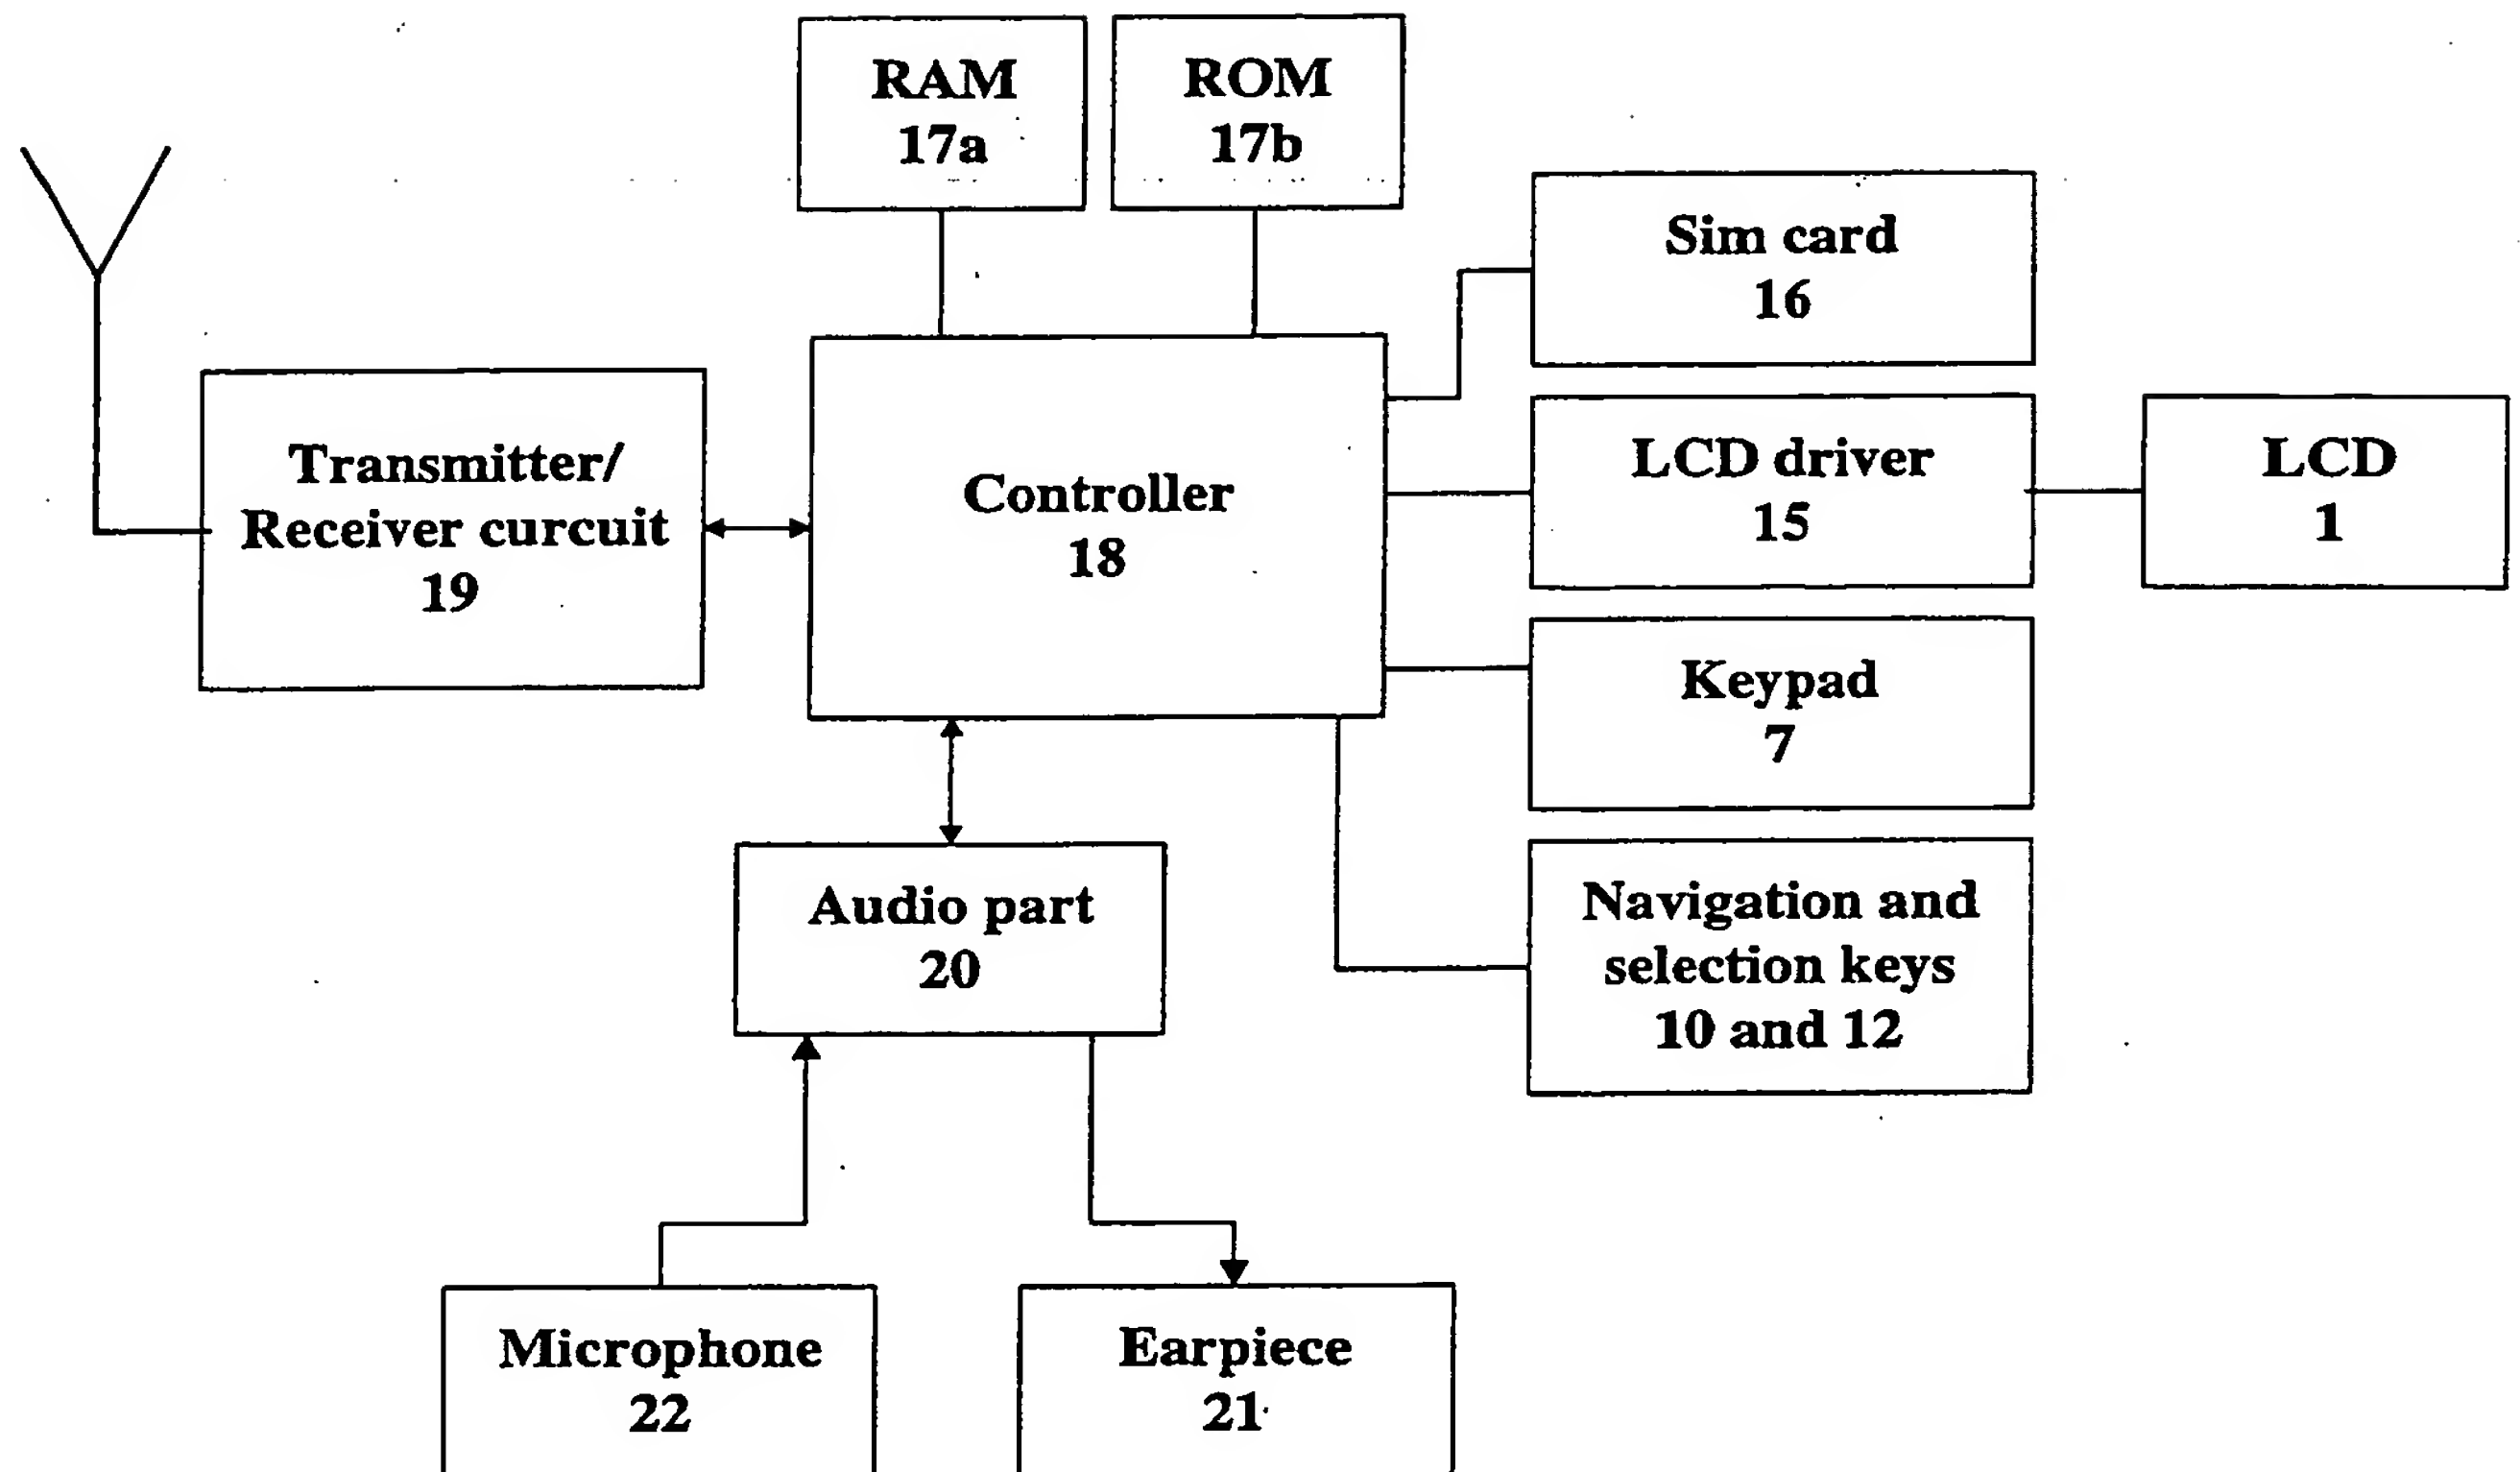


Fig. 2

**THIS PAGE BLANK (USPTO)**

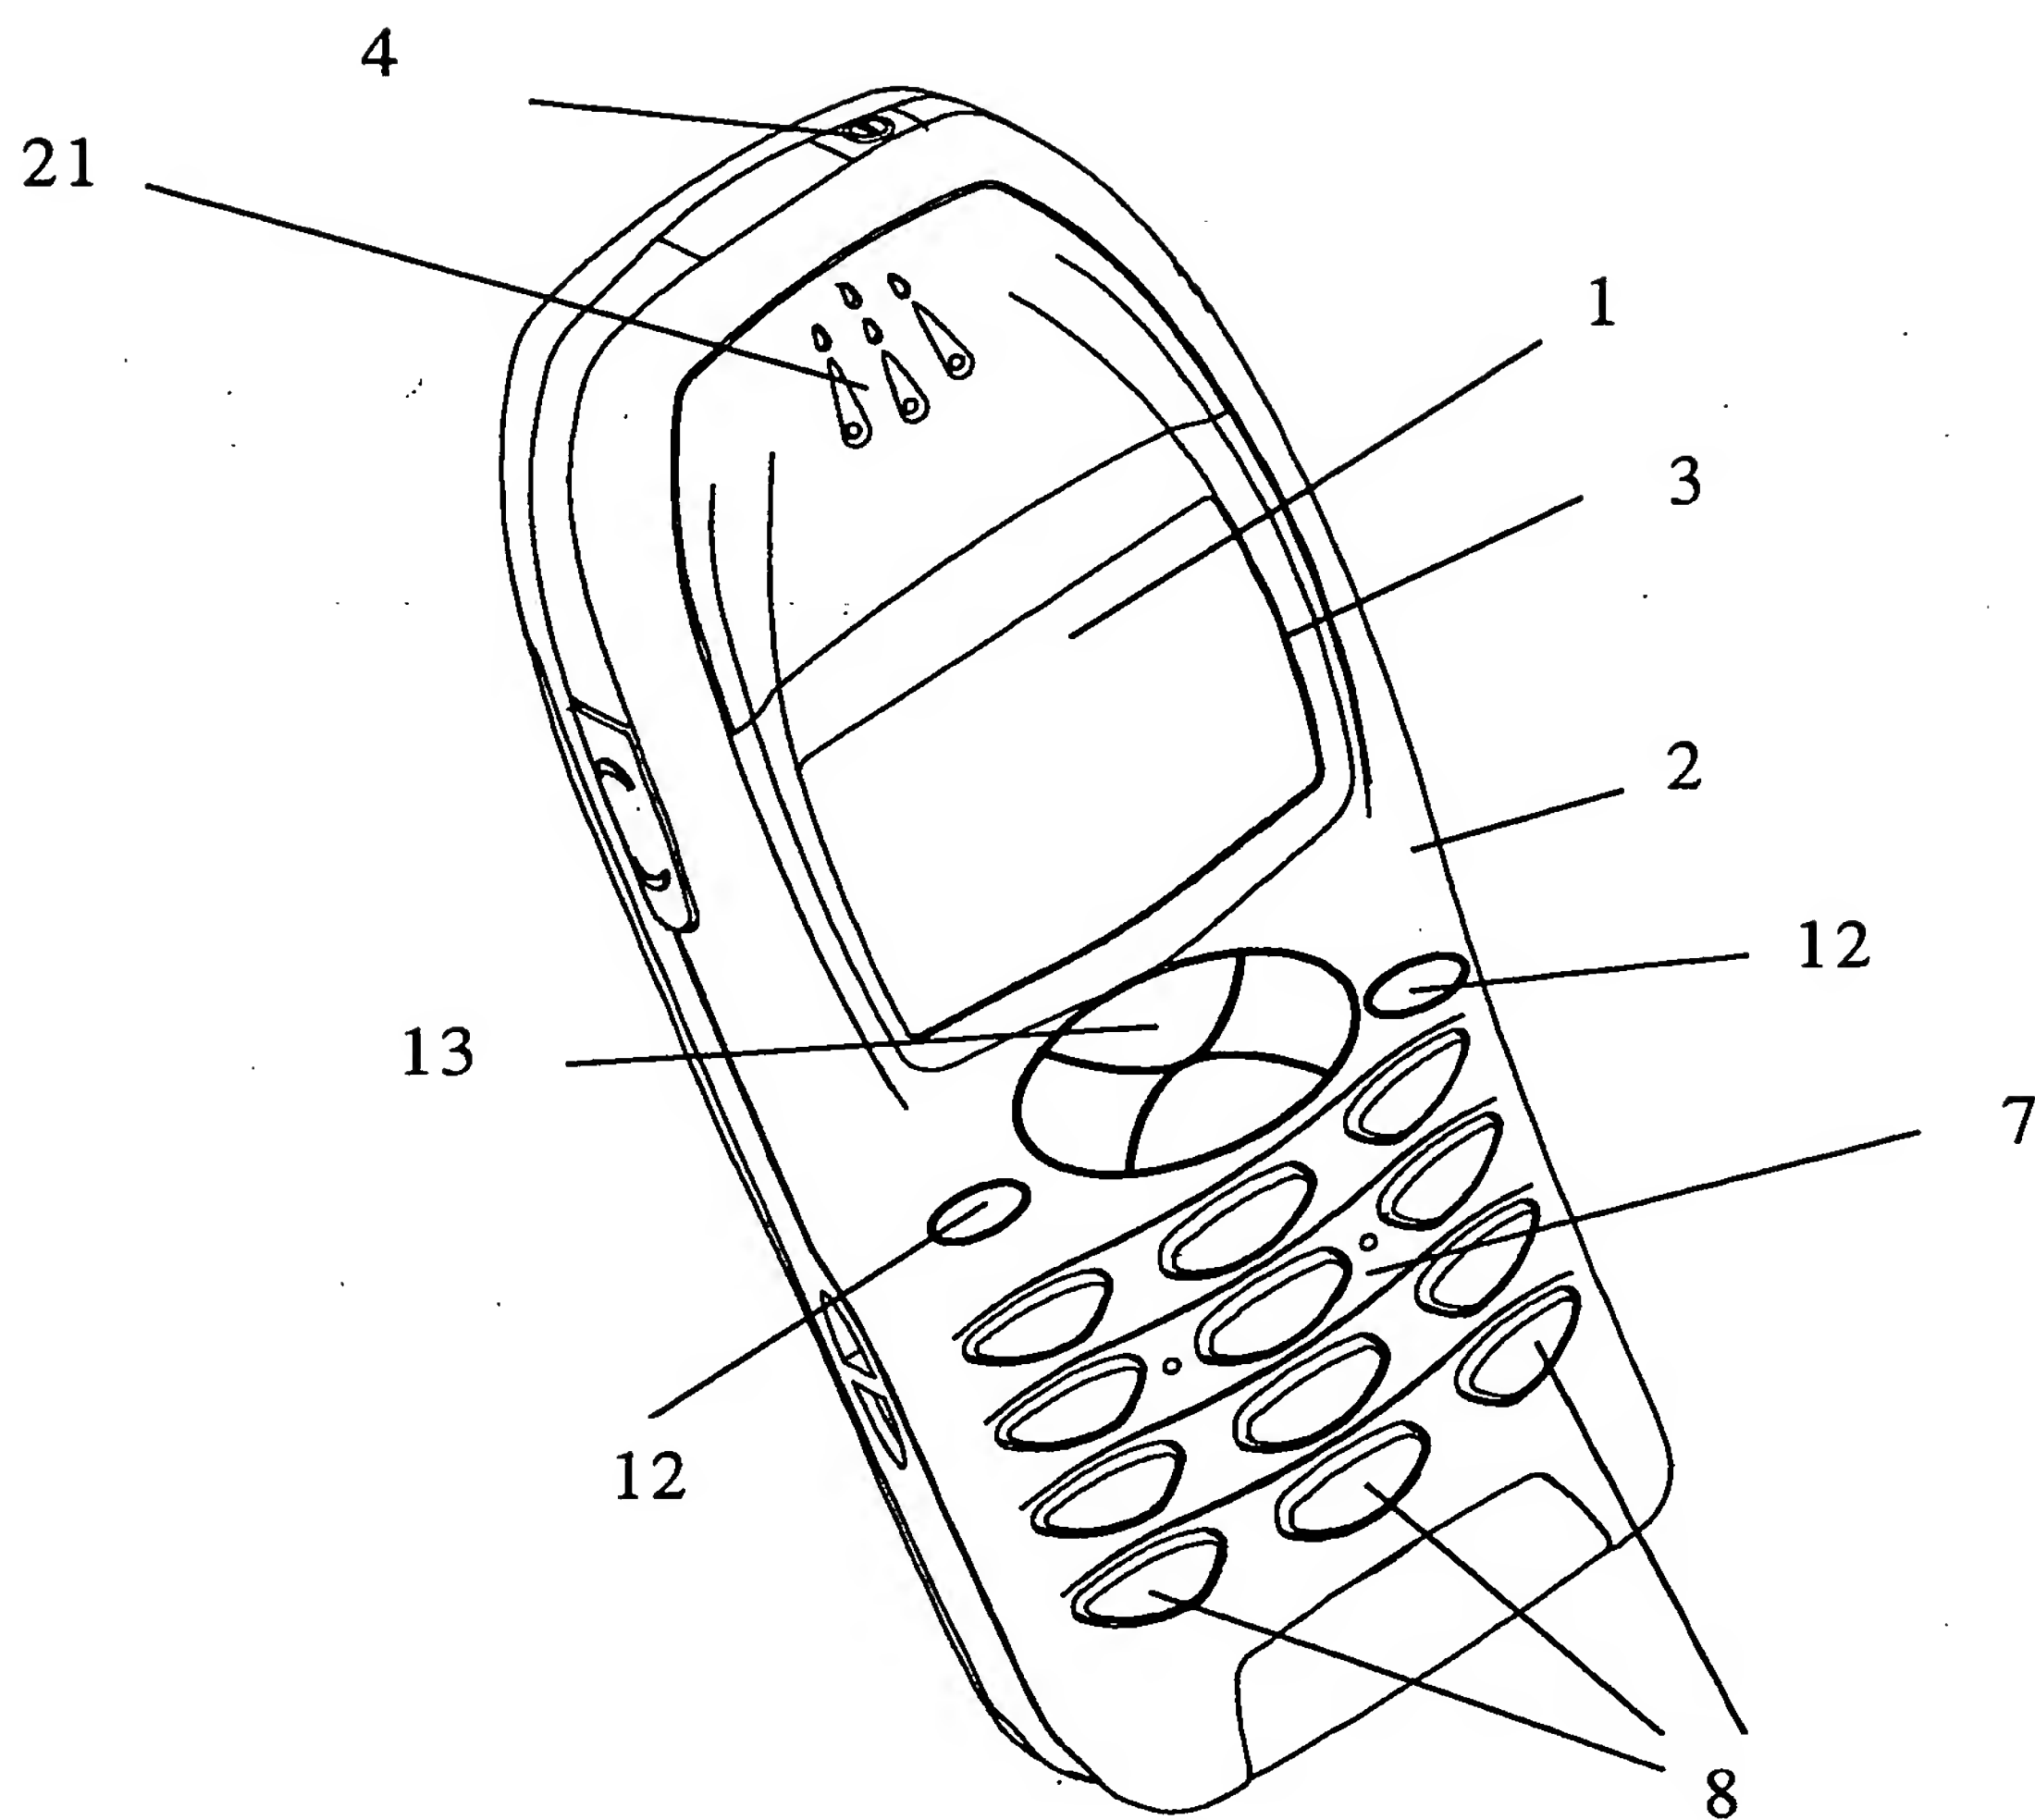


Fig. 3

**THIS PAGE BLANK (USPTO)**